

TOUCH PANEL CURE SYSTEM

UV CURE for AIR-GAP



低溫度照射

Low Temperature

超快速處理

High Throughput

製程最適化

Process Optimized

TOUCH PANEL CURE SYSTEM

UV CURE for AIR-GAP

1. Configuration

- Power Supply 2Sets
- Lamp House 2Sets
- Metal Halide Lamp 2EA
- Blower 2Sets

2. Specifications

- wavelength 280 ~ 440nm
- Lamp input [Manual] 80, 120, 160W/cm
- Lamp Length 500mm
- Conveyor Speed 0.2 ~ 2.0m/min
- Energy 2500 ~ 15000J/cm²
- Intensity 200mW/cm² (@365nm UIT-250/C365 USHIO meter)





3. Usage environment

- Temp. : 0 ~ 40°C
- Humidity : < 70%
(Clean room : Class 1000)
- Surface : Stainless Steel

4. Utility

- Power
 - AC 220V 3 Phase 60Hz 100A
 - BRAKER 125A over
- Exhaust
 - High Temp. Exhaust : 10m³/min(Φ125mm)×2
 - Low Temp. Exhaust : 10m³/min(Φ125mm)×2
CDA 5kg/cm² over , 600 l/min over

Specifications can be customized freely for customer requests.

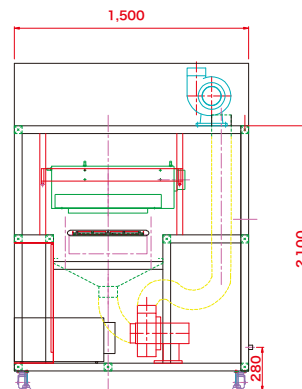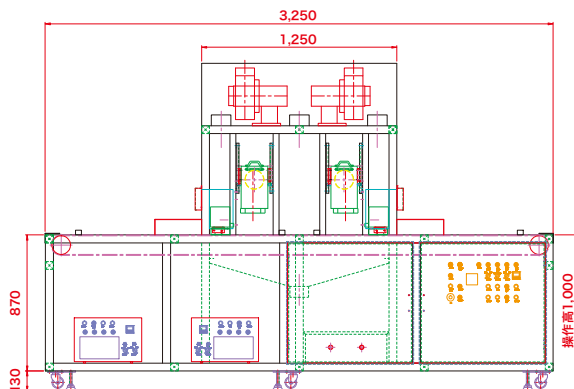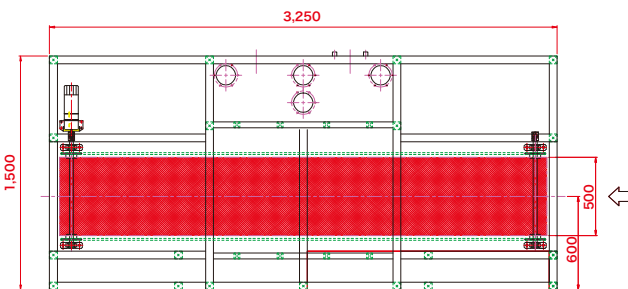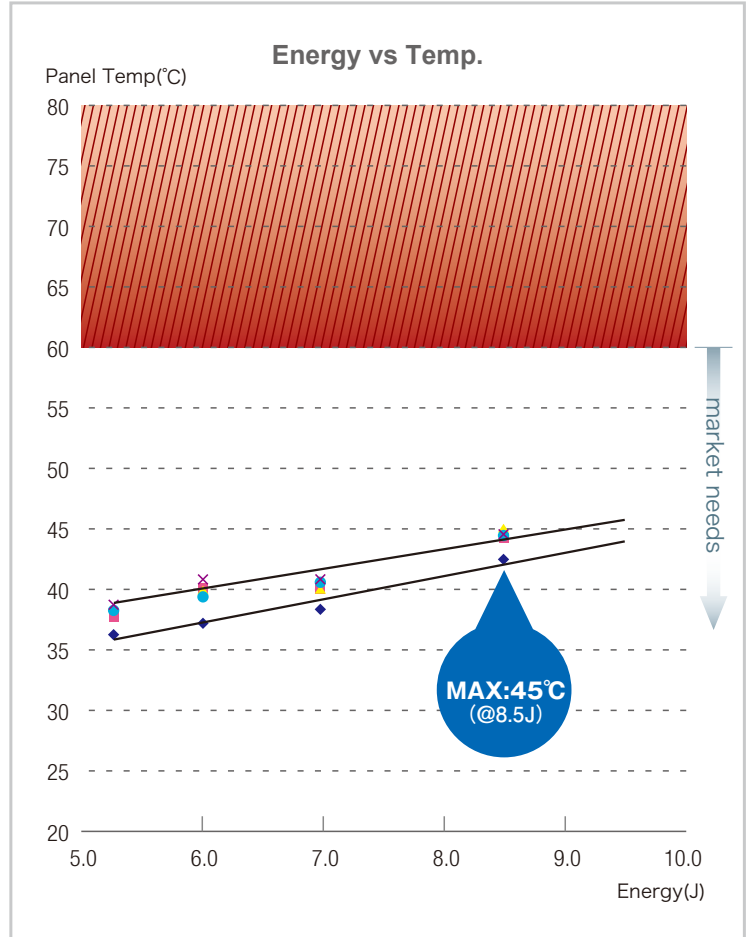

USHIO Lighting—Edge Technologies

USHIO TAIWAN, INC.

10F, #31, Sec.1, Chung-Shiaw E. Rd., Taipei 100, Taiwan, R.O.C.
 TEL: +886-2-2322-4103 / FAX: +886-2-2394-4140
 郭旻雅 (MIA Kuo) mia@ushio.com.tw
<http://www.ushio.com.tw/>

USHIO SHANGHAI, INC.

HSBC Tower, 10F, 1000 Lujiazui Ring Road, Pudong New Area, Shanghai, 200120, P.R.C.
 TEL: +86-21-6841-1135 / FAX: +86-21-6841-1150
 蔡国兵 (TONY Cai) tonycai@ushio.com.cn
<http://www.ushio.com.cn/>

USHIO SHENZHEN, INC.

15F, Changping Business Mansion, Futian Free Trade Zone, Shenzhen, P.R.C.
 TEL: +86-755-8207-0162 / FAX: +86-755-8207-0161
 鍾利鋒 (Lifeng Zhong) lifeng@ushio.com.cn
<http://www.ushio.com.cn/>